
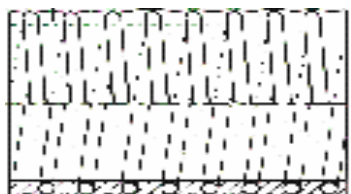


FLORIDA

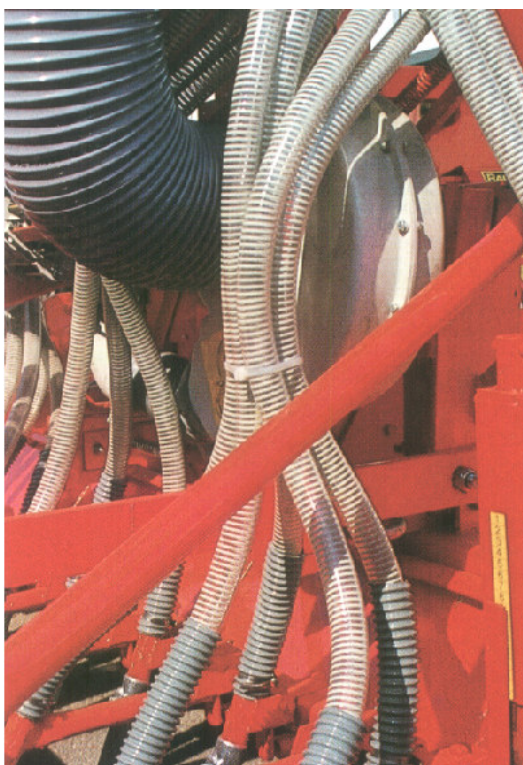

PRIMJENA
MATERIJAL CIJEVI:
OJAČANJE:
TEMPERATURA:

usis i tlak pitke vode, mlijeka, vina, voćnih sokova i drugih prehrambenih tekućina
 prozirni plastificirani PVC - posjeduje prehrambeni certifikat
 tvrdi PVC bijele ili žute boje otporan na gaženje
 -10 +60 °C

Promjer (mm)	Radni tlak (bar)	Rasprs. tlak (bar)	Podtlak (bar)	Težina (kg/m)	Pol. sav. (mm)	Kolut (m)	Montaža	
							Obujmice	
20	7	21	0.7	0.230	70	50	18	23 - 25 Inox
25	7	21	0.7	0.280	110	50	20	29 - 31 Inox
30	7	21	0.7	0.350	140	50	20	32 - 35 Inox
32	7	21	0.7	0.370	150	50	20	36 - 39 Inox
35	7	21	0.7	0.425	160	50	20	40 - 43 Inox
38	6	18	0.6	0.450	170	50	22	44 - 47 Inox
40	6	18	0.6	0.510	180	50	22	48 - 51 Inox
45	6	18	0.6	0.640	200	50	22	52 - 55 Inox
51	6	18	0.6	0.760	230	50	22	56 - 59 Inox
60	5	15	0.5	0.900	280	50	22	64 - 67 Inox
63	5	15	0.5	0.970	300	50	23	68 - 73 Inox
70	5	15	0.4	1.120	310	50	23	74 - 79 Inox
76	5	15	0.4	1.270	340	50	23	80 - 85 Inox
80	5	15	0.3	1.450	350	30	23	86 - 91 Inox
90	3	9	0.4	1.850	450	30	23	98 - 103 Inox
102	3	9	0.4	2.200	500	30	23	113 - 121 Inox
110	3	9	0.3	2.500	550	30	23	122 - 130 Inox
120	3	9	0.3	2.800	700	20	23	131 - 139 Inox
127	3	9	0.3	3.200	750	20	23	140 - 148 Inox
152	2	6	0.3	4.300	850	20	23	149 - 161 Inox
200	2	6	0.3	6.500	1000	10	26	188 - 200 Inox
250	1.5	4.5	0.3	8.500	1800	*	-	-
300	1	3	0.3	11.000	2000	*	-	-

BAND - IT