

PRIKLJUČCI CAMLOCK A ZA ŽBUKANJE

Radni tlak: 50 bara

VRSTA	OZNAKA	MATERIJAL / BRTVA
-------	--------	-------------------

Utičnice sa nogicom	F - NP	Temper ljev / NBR guma
---------------------	--------	------------------------

CAMLOCK A NV35	F - NP 25	(1 ručka)
CAMLOCK A NV41	F - NP 25	
CAMLOCK A NV50	F - NP 35	
CAMLOCK A NV63	F - NP 50	

Utičnica sa vanjskim navojem	F - G R	Temper ljev / NBR guma
------------------------------	---------	------------------------

CAMLOCK A NV63	F - G R2.1/2"	
----------------	---------------	--

Utičnice s unutarnjim navojem	F - U R	Temper ljev / NBR guma
-------------------------------	---------	------------------------



CAMLOCK A NV35	F - U R1"	(1 ručka)
CAMLOCK A NV41	F - U R1"	
CAMLOCK A NV50	F - U R1"	
CAMLOCK A NV50	F - U R1.1/4"	
CAMLOCK A NV50	F - U R1.1/2"	
CAMLOCK A NV63	F - U R2"	

Utikači sa nogicom	M - NP	Pocinčani čelik
--------------------	--------	-----------------

CAMLOCK A NV35	M - NP 25	
CAMLOCK A NV41	M - NP 25	
CAMLOCK A NV50	M - NP 35	
CAMLOCK A NV63	M - NP 50	

Utikači s unutarnjim navojem	M - U R	Pocinčani čelik
------------------------------	---------	-----------------

CAMLOCK A NV35	M - U R1"	
CAMLOCK A NV41	M - U R1"	
CAMLOCK A NV41	M - U R1.1/4"	
CAMLOCK A NV50	M - U R1"	
CAMLOCK A NV50	M - U R1.1/4"	
CAMLOCK A NV50	M - U R1.1/2"	
CAMLOCK A NV63	M - U R2"	
CAMLOCK A NV63	M - U R2.1/2"	

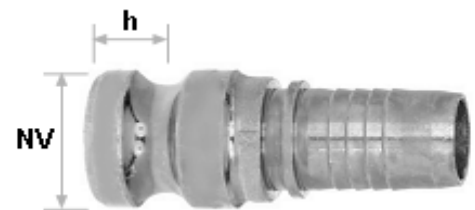

- Napomene:**
- Kod ovih se priključaka pod nazivnom veličinom NV podrazumijeva promjer glave utikača.
 - Razmak **h = 22 mm** (utičnice i utikači CAMLOCK AM nazivnih veličina 50 i 63 imaju razmak $h = 23,5$ mm)