


CIJEVI KVB FE

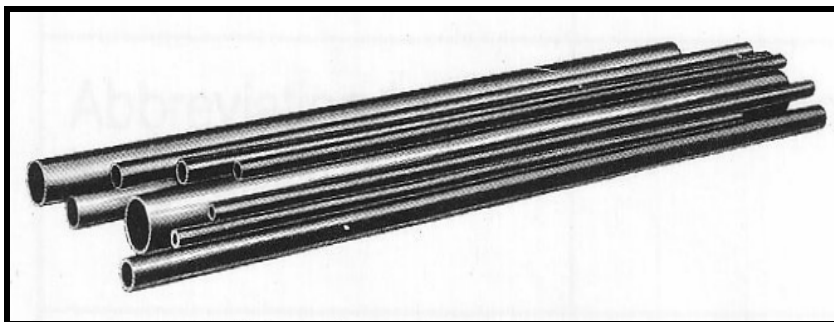

PRIMJENA: krute visokotlačne bešavne cijevi za hidrauliku
MATERIJAL CIJEVI: čelik St 37.4 ili St 52
POVRŠINSKA ZAŠTITA: fosfatiranje (P) ili cinčanje (Zn)
TEMPERATURA: -20 +120°

Promjer (mm)	Toleranca (mm)	Debljina (mm)	Radni tlak (bar)		Rasprs. tlak (bar)	Težina (kg/m)
			Statički	Dinamički		
4	± 0.10	1.0	522	502	2850	0.075
5	± 0.10	1.0	432	416	2120	0.099
6	± 0.10	1.0	389	374	1680	0.123
		1.5	549	528	3050	0.166
8	± 0.10	1.0	333	289	1190	0.222
		1.5	431	441	1860	0.240
		2.0	549	528	3020	0.296
10	± 0.10	1.0	282	249	870	0.222
		1.5	373	358	1380	0.314
		2.0	478	460	2100	0.395
		3.0	666	641		0.518
12	± 0.08	1.0	235	210	760	0.271
		1.5	353	305	1150	0.388
		2.0	409	393	1580	0.493
		2.5	495	476	2600	0.586
14	± 0.08	1.5	302	265	940	0.462
		2.0	403	343	1340	0.592
		2.5	434	417	1760	0.709
15	± 0.08	1.0	188	171	590	0.345
		1.5	282	249	980	0.499
		2.0	376	323	1250	0.641
		3.0	478	460	2120	0.888
16	± 0.08	1.0	176	160	540	0.370
		1.5	235	210	820	0.536
		2.0	353	305	1170	0.691
		2.5	386	372	1470	0.832
		3.0	452	435	1920	0.962

18	± 0.08	1.5	235	210	780	0.610
		2.0	313	274	1040	0.789
		2.5	392	335	1320	0.956
		3.0	409	393	1830	1.111
20	± 0.08	1.5	212	191	570	0.684
		2.0	282	249	920	1.079
		2.5	353	305	1220	1.079
		3.0	373	358	1450	1.258
		3.5	426	410	1720	1.424
22	± 0.08	1.5	192	174	590	0.758
		2.0	256	228	850	0.986
		2.5	320	280	1040	1.202
		3.0	385	329		1.406
25	± 0.08	2.0	226	202	670	1.134
		2.5	282	249	920	1.387
		3.0	338	294	1050	1.628
		4.0	394	379	1520	2.072
28	± 0.08	1.5	151	139	450	0.980
		2.0	201	182	620	1.282
		2.5	252	224	770	1.572
		3.0	302	265	920	1.850
30	± 0.08	2.0	188	171	620	1.381
		2.5	235	210	770	1.695
		3.0	282	249	920	1.998
		4.0	376	323	1250	2.565
		5.0	409	393	1580	3.083
35	± 0.15	2.0	161	147	470	2.189
		2.5	201	182	620	2.004
		3.0	242	216	720	2.367
		5.0	403	343		3.699
38	± 0.15	2.5	186	168	550	2.189
		3.0	223	200	660	2.589
		4.0	297	261	970	3.354
		5.0	371	319	1350	4.069
42	± 0.20	2.0	134	124	390	1.973
		3.0	201	182	580	2.885
		4.0	269	238	850	3.749

Napomena: Krute visokotlačne bešavne cijevi za hidrauliku se isporučuju u standardnim dužinama od 6 m.